



RD11 option Board general purpose I/O

1. RD11 IO Introduction to expansion card

RD11 series frequency converters have powerful expansion functions. RD11 option Board general purpose IO is a terminal expansion card suitable for RD11 series frequency converters of our company. The expansion card is installed in slots EX-A and EX-B of the frequency converter. The board adds 4 digital inputs, 1 digital output, 1 relay output, 1 analog output and an input for PT100/PT1000/KTY84 sensors

2. RD11 IO card order model

Product order model: 11A00PAC004

3. RD11 IO : how to use the expansion card

3.1 Product technical parameters

Input	Response frequency range	Input impedance	Effective level range
X6, X7, X8	5 kHz	4,4 KΩ	High level: 10~30V Low level: 0~5V
X10	50 kHz	1,5 KΩ	High level: 10~30V Low level: 0~5V

Select plc2 to connect to 24 V or com through jumper switch S7 to support NPN and PNP transistor signal number input

Characteristics of digital output signal		
Signal name	Output mode	maximum output
Y2	NPN Transistor open collector output	DC24V/50mA
TA2, TB2, TC2	Relay normally open normally closed output	3A/250VAC 3A/30VDC

PK + / PK - temperature sensor signal				
Signal name	Thermocouple category	How to choose	Input mode	Detection temperature range
PK+/PK-	PT100	Dial switch S1 selection	Different ial two wire input	0°C~220°C
	KTY84	Setting parameter		
	PT1000	selection switch S1		

Note: Please refer to section 3.3 and 3.6 for the specific selection method of thermocouple type

category	AO2 analog output signal characteristics (selected by J2 jumper switch)		
	Signal name	Output capacity	remarks
AO2	AO2-V(voltage output)	DC 0-10V output	Maximum output 2mA
	AO2-I(current output)	DC 0-20mA or 4-20mA output	

3.2 Function description of signal terminal

terminal definition	Terminal name	explain
Digital quantity Input terminal	X6	Digital switch input terminal and com constitute a loop
	X7	Digital switch input terminal and com constitute a loop
	X8	Digital switch input terminal and com constitute a loop
	X10	The digital switch input terminal forms the loop with com, and the digital switch input terminal forms the loop with com (PUL high speed pulse input, maximum frequency: 50KHz)
Common terminal	COM	Digital switch input and output reference terminal
	PLC2	Plc2 connection common terminal

		(24 V or com can be selected through jumper switch S7)
Digital quantity Output terminal	Y2	Digital switch output terminal, maximum output DC24V / 50mA
	TA2	Relay output terminal
	TB2	Relay output terminal
	TC2	Relay output terminal
Motor temperature sensor Input terminal	PK+	PT100 or kty84 / PT1000 temperature sensor input+
	PK-	PT100 or kty84 / PT1000 temperature sensor input-

3.3 Function description of selection terminal

Refer to the following table for relevant descriptions of jumper switch:


Switch definition	Gear name	explain
S7	+24V	+24 V external power supply, maximum output 100 mA current
	PLC2	PLC terminal, can be connected to + 24 V or com
	COM	+24 V power supply reference ground, output collector open circuit signal reference ground
S1	PK	PK and PT100 are short circuited, and PT100 temperature sensor type is selected; PK and kty are short circuited, and kty84 / PT1000 temperature sensor type is selected (see section 3.6 for kty84 / PT1000 selection);
		PT100
		KTY
	PT100	PT100 temperature sensor input
	KTY	Kty84 / PT1000 temperature sensor input
J2	AO2	AO2 is used as analog output signal
	V	The jumper switch selects V and selects the output voltage signal
	I	Jumper switch select I, select current signal

Note: set S7 factory setting to above, that is, plc2 is connected to + 24 V gear

Set S1 factory setting to PT100 and select PT100 temperature sensor type input

J2 factory settings set to V gear, default voltage output

3.4 Product diagram

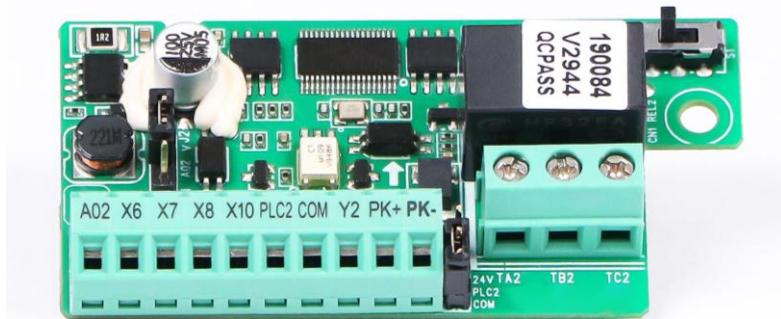

3.5 Wiring precautions

The terminal signal line of RD11 expansion card should be separated from the power line to avoid mutual interference between strong and weak current signals.

3.6 Related parameter setting

According to the actual use of frequency converter related parameters. Specifically, the following parameters are involved:

RD11 function code number	Function code name
F05.05、F05.06、F05.07、F05.09	Multi function input terminals 6,7,8,10
F05.30	Pul port signal source
F06.23	Extended output Y1 terminal
F06.24	Extended relay output 2
F10.26	Motor overheat protection selection (extension) (kty84 / PT1000 selection)

F10.27	Motor overheat alarm level (Extended)
F10.28	Motor overheat warning level (Extended)
F12.50	Processing of communication disconnection of expansion port

4. Size

4.1 Board size drawing

The expansion card
is installed on the
EX-A interface

